


Quick Installation Guide

Unmanaged Full Gigabit PoE Switch

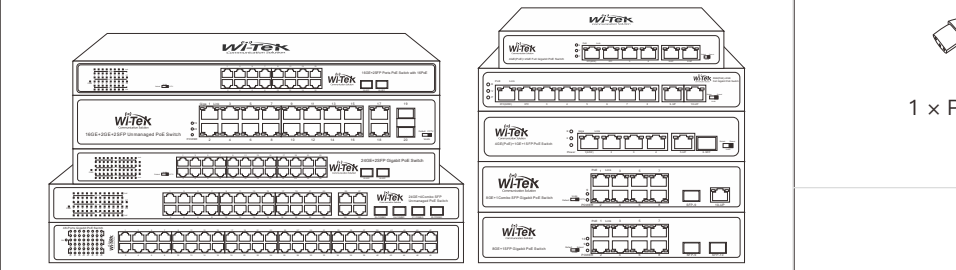


WI-PS305G(V2) | WI-PS308G(V2) | WI-PS305GF | WI-PS309GF | WI-PS310GF |
WI-PS318GF | WI-PS320GF | WI-PS326GF | WI-PS328GF | WI-PS348G


1. Package Contents




Switch x 1



1 x Power Cord



1 x Rack mount kit



1 x Wall mount kit




1 x Installation guide


2. Appearance Overview

For WI-PS305G

• Front Panel

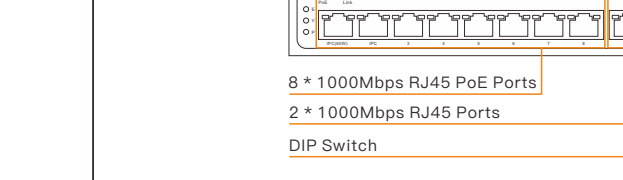

• Back panel

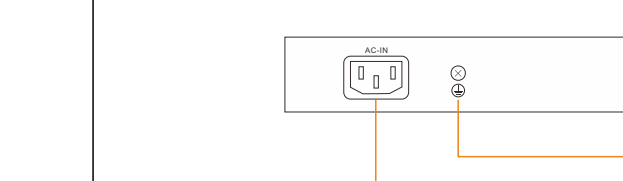


• DIP Switch Description and LED Indicator

WI-PS305G DIP Switch Description	
Default	The transmission distance of PoE port can be up to 100m with 100Mbps
VLAN	All downlink ports are isolated from each other, but can communicate with uplink ports
Extend	The transmission distance of PoE port can be up to 250m, but the rate is limited to 10Mbps


LED Indicators	Description
P	Solid on: The device power on is normal Off: The device is power off or failed
PoE	Solid on: PoE enabled Off: PoE disabled
Link	Solid on: The port link up Blinking: The Data on TX/RX Solid on: The port link down
E	On: DIP switch is enabled in Extend mode Off: DIP switch is disabled in VLAN mode
1000M	On: The negotiate speed is 1000Mbps and ports link up Off: The negotiate speed is 10/100Mbps, not 1000Mbps

For WI-PS308G

• Front panel

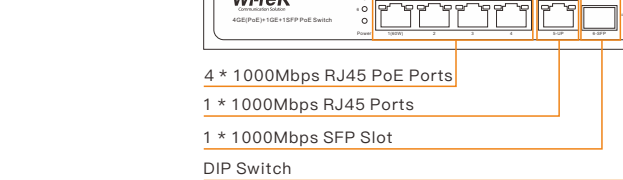

• Back panel

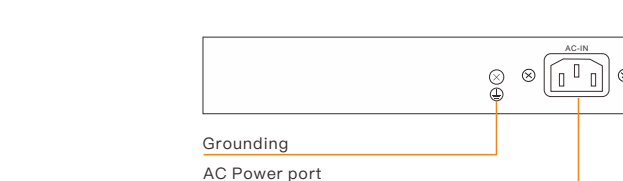


• DIP Switch Description and LED Indicator

WI-PS308G DIP Switch Description	
Default	The transmission distance of PoE port can be up to 100m with 100Mbps
VLAN	All downlink ports are isolated from each other, but can communicate with uplink ports
Extend	The transmission distance of PoE port can be up to 250m, but the rate is limited to 10Mbps


LED Indicators	Description
P	Solid on: The device power on is normal Off: The device is power off or failed
PoE	Solid on: PoE enabled Off: PoE disabled
Link	Blinking: The Data on TX/RX Solid on: The port link down On: DIP switch is enabled in Extend mode Off: DIP switch is disabled in VLAN mode
E	On: DIP switch is enabled in Extend mode Off: DIP switch is disabled in VLAN mode
1000M	On: The negotiate speed is 1000Mbps and ports link up Off: The negotiate speed is 10/100Mbps, not 1000Mbps

For WI-PS305GF

• Front panel

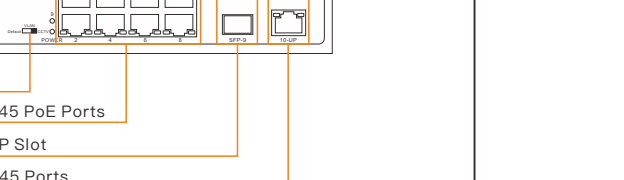

• Back panel

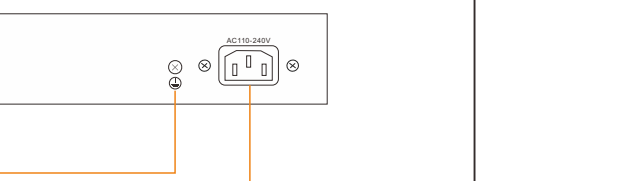


• DIP Switch Description and LED Indicator

WI-PS305GF DIP Switch Description	
Default	The transmission distance of PoE port can be up to 100m with 100Mbps
VLAN	All downlink ports are isolated from each other, but can communicate with uplink ports
Extend	The transmission distance of PoE port can be up to 250m, but the rate is limited to 10Mbps


LED Indicators	Description
P	Solid on: The device power on is normal Off: The device is power off or failed
PoE	Solid on: PoE enabled Off: PoE disabled
Link	Blinking: The Data on TX/RX Solid on: The port link down On: DIP switch is enabled in Extend mode Off: DIP switch is disabled in VLAN mode
E	On: DIP switch is enabled in Extend mode Off: DIP switch is disabled in VLAN mode
1000M	On: The negotiate speed is 1000Mbps and ports link up Off: The negotiate speed is 10/100Mbps, not 1000Mbps

For WI-PS309GF

• Front panel

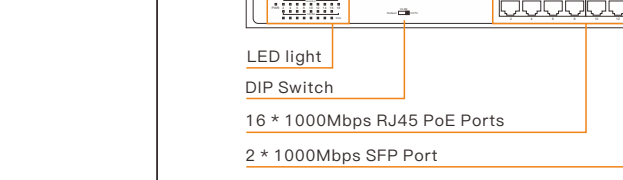

• Back panel

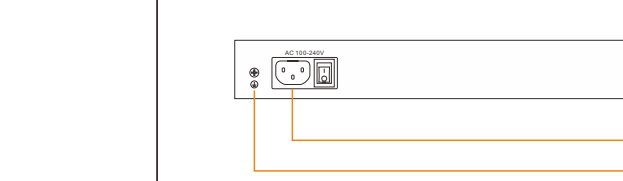


• DIP Switch Description and LED Indicator

WI-PS309GF DIP Switch Description	
Default	The transmission distance of PoE port can be up to 100m with 100Mbps
VLAN	All downlink ports are isolated from each other, but can communicate with uplink ports
Extend	The transmission distance of PoE port can be up to 250m, but the rate is limited to 10Mbps


LED Indicators	Description
P	Solid on: The device power on is normal Off: The device is power off or failed
PoE	Solid on: PoE enabled Off: PoE disabled
Link	Blinking: The Data on TX/RX Solid on: The port link down On: DIP switch is enabled in Extend mode Off: DIP switch is disabled in VLAN mode
E	On: DIP switch is enabled in Extend mode Off: DIP switch is disabled in VLAN mode
1000M	On: The negotiate speed is 1000Mbps and ports link up Off: The negotiate speed is 10/100Mbps, not 1000Mbps

For WI-PS310GF

• Front panel

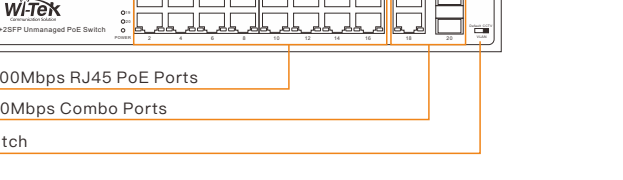

• Back panel

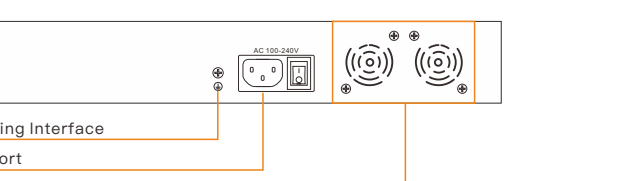

• DIP Switch Description and LED Indicator

WI-PS310GF DIP Switch Description	
Default	The transmission distance of PoE port can be up to 100m with 100Mbps
VLAN	All downlink ports are isolated from each other, but can communicate with uplink ports
Extend	The transmission distance of PoE port can be up to 250m, but the rate is limited to 10Mbps

LED Indicators	Description
POWER	Solid on: The device power on is normal Off: The device is power off or failed
PoE	Solid on: PoE enabled Off: PoE disabled
Link	Blinking: The Data on TX/RX Solid on: The port link down On: DIP switch is enabled in Extend mode Off: DIP switch is disabled in VLAN mode
E	On: DIP switch is enabled in Extend mode Off: DIP switch is disabled in VLAN mode
1000M	On: The negotiate speed is 1000Mbps and ports link up Off: The negotiate speed is 10/100Mbps, not 1000Mbps

For WI-PS318GF

• Front panel



• Back panel




• DIP Switch Description and LED Indicator

WI-PS318GF DIP Switch Description	
Default	The transmission distance of PoE port can be up to 100m with 100Mbps
VLAN	All downlink ports are isolated from each other, but can communicate with uplink ports
Extend	The transmission distance of PoE port can be up to 250m, but the rate is limited to 10Mbps


LED Indicators	Description
PWR	Solid on: The device power on is normal Off: The device is power off or failed
PoE	Solid on: PoE enabled Off: PoE disabled
Link/Act	Blinking: The Data on TX/RX Solid on: The port link down On: DIP switch is enabled in Extend mode Off: DIP switch is disabled in VLAN mode
1000M	On: The negotiate speed is 1000Mbps and ports link up Off: The negotiate speed is 10/100Mbps, not 1000Mbps

For WI-PS320GF

• Front panel

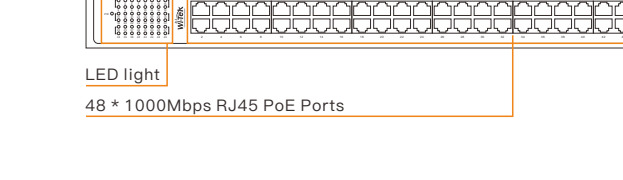

• Back panel

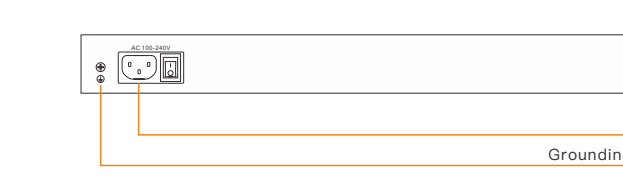


• DIP Switch Description and LED Indicator

WI-PS320GF DIP Switch Description	
Default	The transmission distance of PoE port can be up to 100m with 100Mbps
VLAN	All downlink ports are isolated from each other, but can communicate with uplink ports
Extend	The transmission distance of PoE port can be up to 250m, but the rate is limited to 10Mbps

LED Indicators	Description
POWER	Solid on: The device power on is normal Off: The device is power off or failed
PoE	Solid on: PoE enabled Off: PoE disabled
Link	Blinking: The Data on TX/RX Solid on: The port link down On: DIP switch is enabled in Extend mode Off: DIP switch is disabled in VLAN mode
E	On: DIP switch is enabled in Extend mode Off: DIP switch is disabled in VLAN mode
1000M	On: The negotiate speed is 1000Mbps and ports link up Off: The negotiate speed is 10/100Mbps, not 1000Mbps

For WI-PS326GF

• Front panel

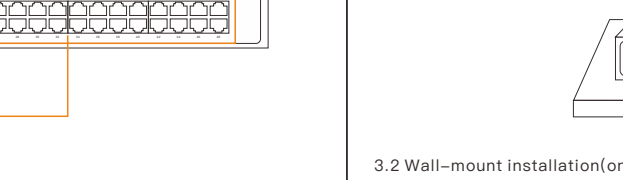

• Back panel




• DIP Switch Description and LED Indicator

WI-PS326GF DIP Switch Description	
Default	The transmission distance of PoE port can be up to 100m with 100Mbps
VLAN	All downlink ports are isolated from each other, but can communicate with uplink ports
Extend	The transmission distance of PoE port can be up to 250m, but the rate is limited to 10Mbps

LED Indicators	Description
PWR	Solid on: The device power on is normal Off: The device is power off or failed
PoE	Solid on: PoE enabled Off: PoE disabled
Link/Act	Blinking: The Data on TX/RX Solid on: The port link down On: DIP switch is enabled in Extend mode Off: DIP switch is disabled in VLAN mode
1000M	On: The negotiate speed is 1000Mbps and ports link up Off: The negotiate speed is 10/100Mbps, not 1000Mbps

For WI-PS328GF

• Front panel

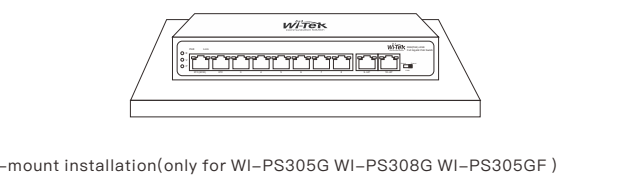

• Back panel



• DIP Switch Description and LED Indicator

WI-PS328GF DIP Switch Description	
Default	The transmission distance of PoE port can be up to 100m with 100Mbps
VLAN	All downlink ports are isolated from each other, but can communicate with uplink ports
Extend	The transmission distance of PoE port can be up to 250m, but the rate is limited to 10Mbps


LED Indicators	Description
PWR	Solid on: The device power on is normal Off: The device is power off or failed
PoE	Solid on: PoE enabled Off: PoE disabled
Link/Act	Blinking: The Data on TX/RX Solid on: The port link down On: DIP switch is enabled in Extend mode Off: DIP switch is disabled in VLAN mode
1000M	On: The negotiate speed is 1000Mbps and ports link up Off: The negotiate speed is 10/100Mbps, not 1000Mbps

For WI-PS348G

• Front panel



• Back panel

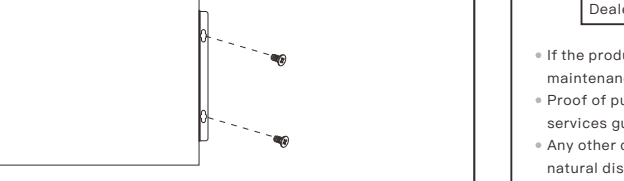

• DIP Switch Description and LED Indicator

WI-PS348G DIP Switch Description	
Default	The transmission distance of PoE port can be up to 100m with 100Mbps
VLAN	All downlink ports are isolated from each other, but can communicate with uplink ports
Extend	The transmission distance of PoE port can be up to 250m, but the rate is limited to 10Mbps

LED Indicators	Description
PWR	Solid on: The device power on is normal Off: The device is power off or failed
PoE	Solid on: PoE enabled Off: PoE disabled
Link/Act	Blinking: The Data on TX/RX Solid on: The port link down On: DIP switch is enabled in Extend mode Off: DIP switch is disabled in VLAN mode
1000M	On: The negotiate speed is 1000Mbps and ports link up Off: The negotiate speed is 10/100Mbps, not 1000Mbps

• Desktop Installation



3.2 Wall-mount installation(only for WI-PS305G WI-PS308G WI-PS305GF)

3.3 Rack-mount installation

Warranty Card

Username	
Address	
Telephone No.	
Purchase Shop	
Purchase Address	
Product Model No.	
Purchase Time	
Serial No.	
Dealer Signature	

* If the product defects within the warranty period, we will provide professional maintenance service.
* Proof of purchase and a complete product serial number are required to receive any services guaranteed as part of the limited warranty.
* Any other defects that are not caused by workmanship or product quality, such as natural disasters, water damage, extreme thermal or environmental conditions, sticker damaged, warranty card loss will disqualify the product from limited warranty.



Wireless-Tek Technology Limited
Address: Building 3, Units 1801-1807, 1812,
Huaqiang Era Plaza, Tangwei Community,
Fuhai Street, Bao'an District, Shenzhen City,
Guangdong Province, China.
Website: www.wireless-tek.com
Tel: 86-0755-32811290
Email: sales@wireless-tek.com
Technical Support: tech@wireless-tek.com

