



**WI-PMS328GF-Alien
24GE+4Combo Ports
24-48V L2 Managed Super PoE Switch
with 24-Port PoE
Data sheet**

Highlights




- 24GE+4Combo Full Gigabit Switch with 24 PoE ports
- Wi-Tek Smart PoE Tech support 24-48v PoE output via auto-detect and select in software for port 1-4
- Support 802.3bt 90W for port 5-8, 802.3af/at 30W for port 9-24
- Internal power adapter supply 400W output power
- L2/L3/L4 QoS and IGMP snooping optimize voice and video application
- Support STP/RSTP
- Up to 4K QVLANS simultaneously
- Link Aggregation Control Protocol (LACP)
- WEB/CLI managed modes, SNMP, bring abundant management features

Product



Typical Applications



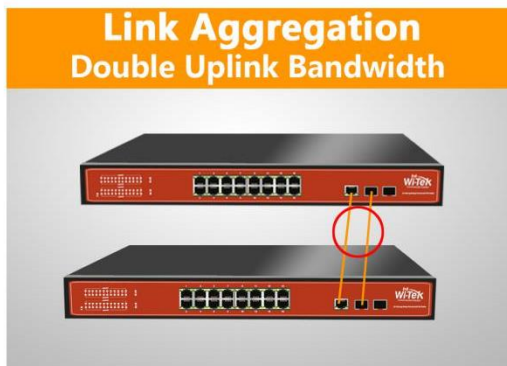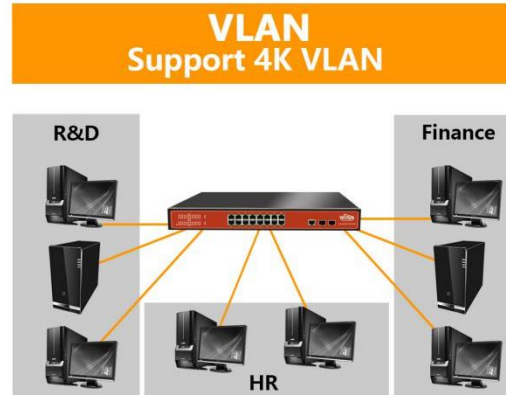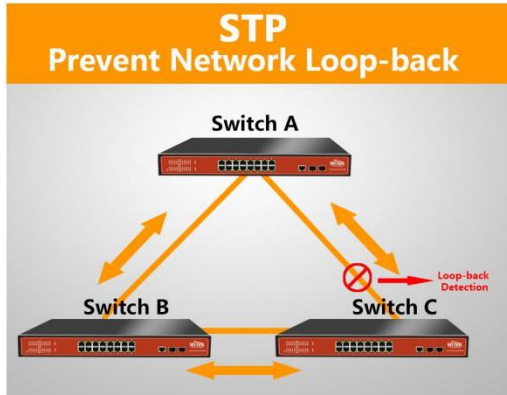

Description

What This Product Does

24 gigabit L2 managed switch WI-PMS328GF-Alien provides 24 10/100/1000Mbps ports. The switch provides high performance, enterprise-level QoS, advanced security strategies and rich layer 2 management features. Moreover, the switch also comes equipped with 4 Gigabit Ethernet/SFP slots, expanding your network flexibly. WI-PMS328GF-Alien is the cost-effective network solution for the ideal small and medium business.

WI-PMS328GF-Alien has robust security and management features. The IP-MAC-Port-

VID Binding and Access Control List (ACL) functions protect against broadcast storms, ARP and Denial-of-Service(DoS) attacks, etc. Quality of Service (QoS, L2 to L4) provides enhanced traffic management capabilities to move your data smoother and faster. Anymore, the easy-to-use web management interfaces, along with CLI, SNMP, mean faster setup and configuration with less downtime. For workgroup and departments requiring cost-sensitive Layer 2 Switch and gigabit capability, Wi-Tek L2 managed Switch WI-PMS328GF-Alien provides you the ideal access-edge solution.

Secure Networking

Wi-Tek this WI-PMS328GF-Alien provides IP-MAC-Port-VID Binding, Port Security, Storm control and DHCP Snooping which protect against broadcast storms, ARP attacks, etc. It integrates some typical DoS attacks to select. You can protect these attacks more easily ever than before. In addition, the Access Control Lists (ACL, L2 to L4) feature restricts access to sensitive network resources by denying packets based on source and destination MAC address, IP address, TCP/UDP ports and even VLAN ID.

Advanced QoS features

To integrate voice, data and video service on one network, the switch applies rich QoS policies. Administrator can designate the priority of the traffic based on a variety of means including IP or MAC address, TCP or UDP port number, etc, to ensure that voice and video are always clear, smooth and jitter free.

Abundant Layer 2 features

For more application of layer 2 switches, WI-PMS328GF-Alien supports a complete lineup of layer 2 features, including 802.1Q tag VLAN, Port Isolation, Port Mirroring, STP/RSTP, Link Aggregation Control Protocol and 802.3x Flow Control function. Any more, the switch

provides advanced features for network maintenance. Such as Loop Back Detection, Cable Diagnostics and IGMP Snooping. IGMP snooping ensures the switch intelligently forward the multicast stream only to the appropriate subscribers while IGMP throttling & filtering restrict each subscriber on a port level to prevent unauthorized multicast access.

Specifications

HARDWARE FEATURES	
Interface	24 10/100/1000Mbps RJ45 Ports (Auto Negotiation/Auto MDI/MDIX) 4 1000Mbps Gigabit Combo SFP Slots 1 Console Port
Network Media	10BASE-T: UTP category 3, 4, 5 cable (maximum 100m) 100BASE-TX/1000Base-T: UTP category 5, 5e, 6 or above cable (maximum 100m) 1000BASE-X: MMF, SMF 1000Base-L X:62.5µm/50µm MM(2m~550m) or 10µm SMF(2m~5000m)
Fan Quantity	2 Fan
Power Budget	400W
Internal Power Supply	AC 110~240V 50/60HZ
PoE Ports (RJ45)	Port1-4: 24V Passive POE and 802.3 AF/AT 30W compliant

HARDWARE FEATURES

	Port5-8: 802.3 AF/AT/BT 90W compliant Port9-24: 802.3 AF/AT 30W compliant Power Supply: 400W
Exchange Capacity	56G
Packet Forwarding Rate	41.7Mpps
Mac Address Table	16K
Packet Buffer Memory	12Mb
Jumbo Frame	10240 Bytes
Dimensions	Product Size: 440mm*290mm*45mm (L*W*H)
Protection Level	Lightning protection 6KV 6KV ESD Contact discharge

SOFTWARE FEATURES

Quality of Service	Support 802.1p CoS/DSCP priority Support 4 priority queues
---------------------------	---

SOFTWARE FEATURES

	<p>Queue scheduling: SP, WRR, SP+WRR Port/Flow- based Rate Limiting</p>
L2 Features	<p>IGMP Snooping V1/V2/V3 802.3ad LACP (Up to 8 aggregation groups, containing 8 ports per group) Spanning Tree STP/RSTP/MSTP Port isolation BPDU filtering/guard TC/Root protect Loop back detection 802.3x Flow Control</p>
VLAN	<p>Supports up to 4K VLANs simultaneously (out of 4K VLAN IDs) Port/ MAC/Protocol-based VLAN Management VLAN configuration</p>
Access Control List	<p>L2~L4 package filtering based on source and destination MAC address, IP address, TCP/UDP ports, 802.1p, DSCP, protocol and VLAN ID; Time Range Based</p>
Security	<p>IP-MAC-Port-VID Binding IEEE 802.1X Port/MAC Based authentication, Radius, Guest VLAN DoS Defence Dynamic ARP inspection (DAI)</p>

SOFTWARE FEATURES	
	SSH v1/v2 SSL v2/v3/TLSv1 Port Security Broadcast/Multicast/Unknown-unicast Storm Control
Management	Web-based GUI and CLI management SNMP v1/v2c/v3, compatible with public MIBs DHCP/BOOTP Client, DHCP Snooping, DHCP Option82 CPU Monitoring Port Mirroring Time Setting: SNTP Integrated NDP/NTDP feature Firmware Upgrade: TFTP & Web System Diagnose: VCT SYSLOG & Public MIBS

OTHERS	
Certification	CE, FCC, RoHS
Package Contents	POE Switch Electric Line Rack-Mount Kit Foot Pad Guide Book/Warranty Card
Environment	Working Temperature: -10°C~55°C Storage temperature : -40°C~70°C Working Humidity :

10%~90% RH
non-condensing
Storage Humidity:
5%~90% RH non-
condensing



WIRELESS-TEK TECHNOLOGY LIMITED
www.wireless-tek.com
Email: sales@wireless-tek.com
Technical Support: tech@wireless-tek.com