




Quick Installation Guide


Wi-Tek 250 Meters Economic CCTV PoE Switch

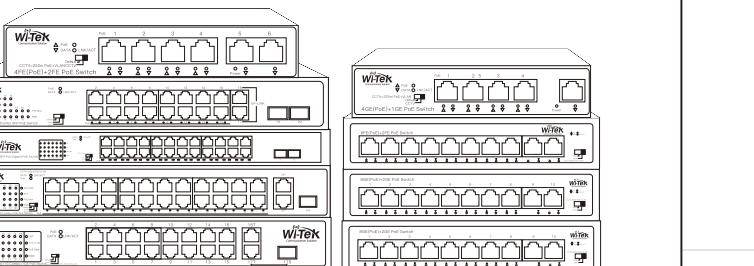


WI-PS205H | WI-PS210H | WI-PS518GH | WI-PS526GH |
WI-PS305GH | WI-PS308GH | WI-PS309GFH | WI-PS318GFH | WI-PS326GFH

www.wireless-tek.com


1.Packing Content




1 x Switch



1 x Power Cord




4 x Mats



1 x Rack mount kit



(only for WI-PS518GH WI-PS526GH WI-PS318GFH WI-PS326GFH)



1 x Installation guide

2. Appearance Overview



WI-PS205H

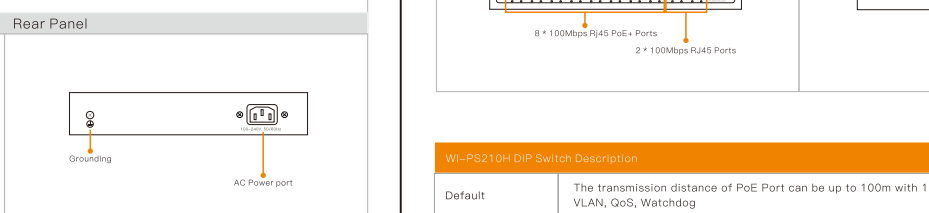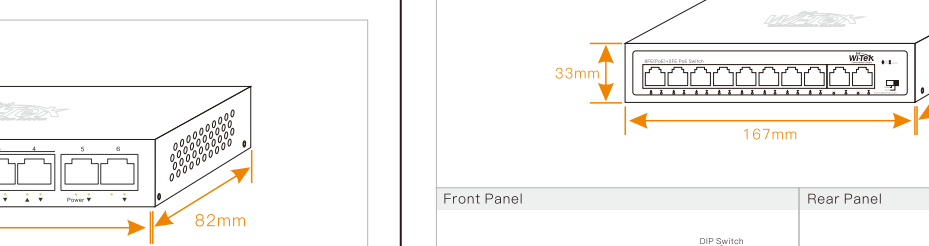

WI-PS205H DIP Switch Description	
Default	The transmission distance of PoE Port can be up to 100m with 100Mbps and disable port VLAN, QoS, Watchdog
CCTV	Enable Port VLAN and Watchdog mode, PoE transmit 250 meters with 10Mbps
LED indicators	Description
Power	On: The device power on is normal Off: The device is power off or failed
DATA	Blinking: Data transmission is active and working
PoE	On: PoE is working Off: PoE not working
LNK/ACT	On: Data on TX/RX Off: Ports link down

Note: PoE Watchdog -All PoE ports enable PoE watchdog function, which can detect and reboot the offline compliant PoE powered devices. Opening and closing PoE watchdog function:Closed by default, watchdog is turned on in VLAN and CCTV modes



WI-PS210H

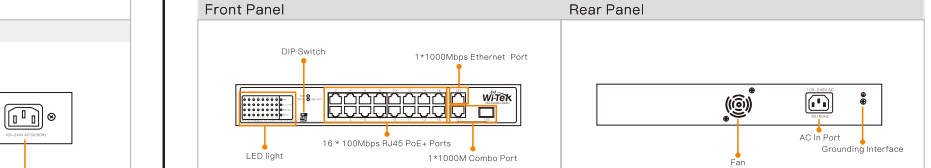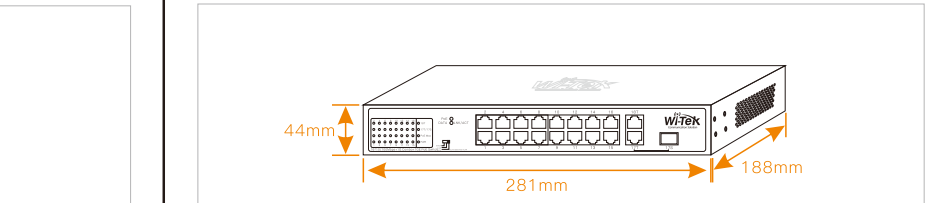

WI-PS210H DIP Switch Description	
Default	The transmission distance of PoE Port can be up to 100m with 100Mbps and disable port VLAN, QoS, Watchdog
CCTV	Enable Port VLAN and Watchdog mode, PoE transmit 250 meters with 10Mbps
LED indicators	Description
Power	On: The device power on is normal Off: The device is power off or failed
DATA	Blinking: Data transmission is active and working
PoE	On: PoE is working Off: PoE not working
LNK/ACT	On: Data on TX/RX Off: Ports link down
PoE Max	When total PoE output power > Power Budget * 80%, the LED light will be on

Note: PoE Watchdog -All PoE ports enable PoE watchdog function, which can detect and reboot the offline compliant PoE powered devices. Opening and closing PoE watchdog function:Closed by default, watchdog is turned on in VLAN and CCTV modes


WI-PS518GH

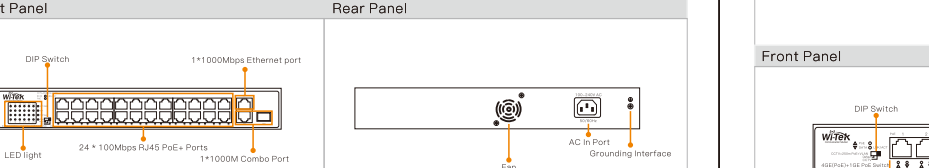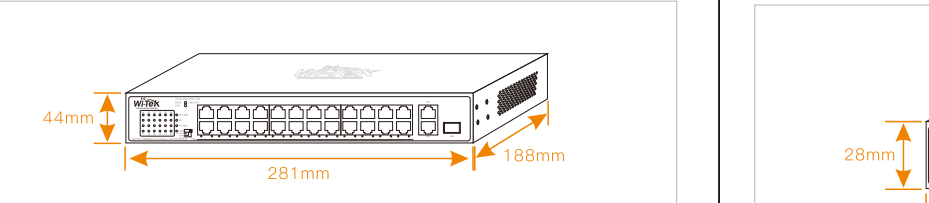

WI-PS518GH DIP Switch Description	
Default	The transmission distance of PoE Port can be up to 100m with 100Mbps and disable port VLAN, Watchdog
CCTV	Enable Port VLAN and Watchdog mode, PoE transmit 250 meters with 10Mbps
LED indicators	Description
Power	On: The device power on is normal Off: The device is power off or failed
DATA	Blinking: Data transmission is active and working
PoE	On: PoE is working Off: PoE not working
LNK/ACT	On: Data on TX/RX Off: Ports link down
PoE Max	When total PoE output power > Power Budget * 80%, the LED light will be on
18T	On: Port 18 link up Off: Port 18 link down
17T/17S	On: Port 17T/17S link up Off: Port 17T/17S link down

Note: PoE Watchdog -All PoE ports enable PoE watchdog function, which can detect and reboot the offline compliant PoE powered devices. Opening and closing PoE watchdog function:Closed by default, watchdog is turned on in VLAN and CCTV modes



WI-PS526GH

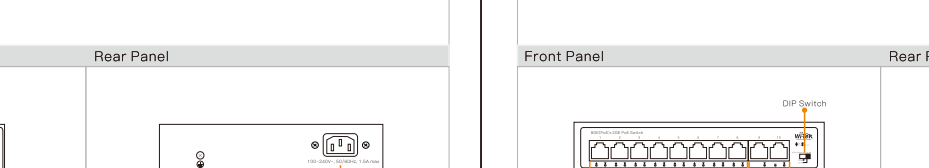

WI-PS526GH DIP Switch Description	
Default	The transmission distance of PoE Port can be up to 100m with 100Mbps and disable port VLAN, Watchdog
CCTV	Enable Port VLAN and Watchdog mode, PoE transmit 250 meters with 10Mbps
LED indicators	Description
Power	On: The device power on is normal Off: The device is power off or failed
DATA	Blinking: Data transmission is active and working
PoE	On: PoE is working Off: PoE not working
LNK/ACT	On: Data on TX/RX Off: Ports link down
PoE Max	When total PoE output power > Power Budget * 80%, the LED light will be on

Note: PoE Watchdog -All PoE ports enable PoE watchdog function, which can detect and reboot the offline compliant PoE powered devices. Opening and closing PoE watchdog function:Closed by default, watchdog is turned on in VLAN and CCTV modes



WI-PS305GH

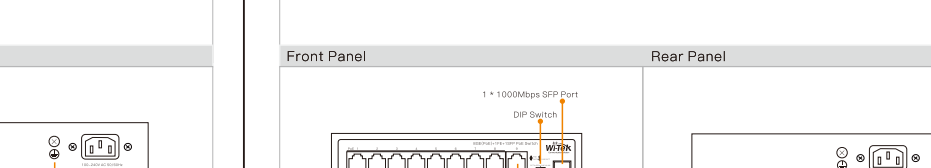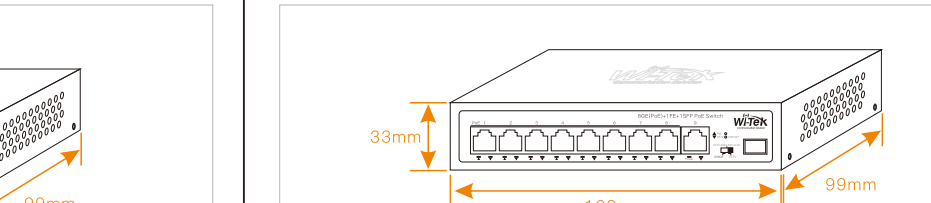

WI-PS305GH DIP Switch Description	
Default	The transmission distance of PoE Port can be up to 100m with 100Mbps and disable port VLAN, Watchdog
CCTV	Enable Port VLAN and Watchdog mode, PoE transmit 250 meters with 10Mbps
LED indicators	Description
Power	On: The device power on is normal Off: The device is power off or failed
DATA	Blinking: Data transmission is active and working
PoE	On: PoE is working Off: PoE not working
LNK/ACT	On: Data on TX/RX Off: Ports link down

Note: PoE Watchdog -All PoE ports enable PoE watchdog function, which can detect and reboot the offline compliant PoE powered devices. Opening and closing PoE watchdog function:Closed by default, watchdog is turned on in VLAN and CCTV modes



WI-PS308GH

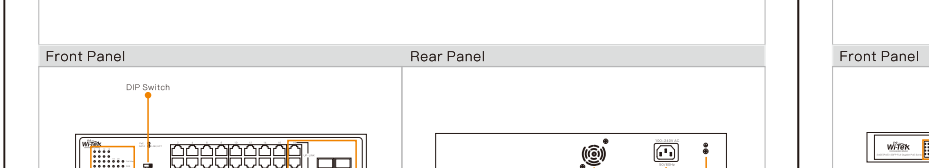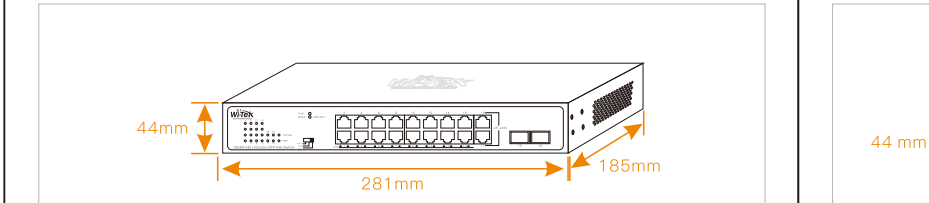

WI-PS308GH DIP Switch Description	
Default	The transmission distance of PoE Port can be up to 100m with 100Mbps and disable port VLAN, Watchdog
CCTV	Enable Port VLAN and Watchdog mode, PoE transmit 250 meters with 10Mbps
LED indicators	Description
Power	On: The device power on is normal Off: The device is power off or failed
DATA	Blinking: Data transmission is active and working
PoE	On: PoE is working Off: PoE not working
LNK/ACT	On: Data on TX/RX Off: Ports link down

Note: PoE Watchdog -All PoE ports enable PoE watchdog function, which can detect and reboot the offline compliant PoE powered devices. Opening and closing PoE watchdog function:Closed by default, watchdog is turned on in VLAN and CCTV modes



WI-PS309GFH

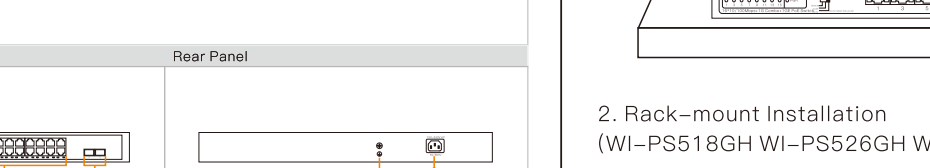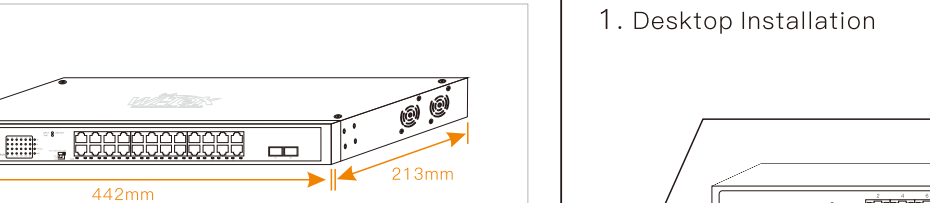

WI-PS309GFH DIP Switch Description	
Default	The transmission distance of PoE Port can be up to 100m with 100Mbps and disable port VLAN, Watchdog
CCTV	Enable Port VLAN and Watchdog mode, PoE transmit 250 meters with 10Mbps
LED indicators	Description
Power	On: The device power on is normal Off: The device is power off or failed
DATA	Blinking: Data transmission is active and working
PoE	On: PoE is working Off: PoE not working
LNK/ACT	On: Data on TX/RX Off: Ports link down

Note: PoE Watchdog -All PoE ports enable PoE watchdog function, which can detect and reboot the offline compliant PoE powered devices. Opening and closing PoE watchdog function:Closed by default, watchdog is turned on in VLAN and CCTV modes



WI-PS318GFH

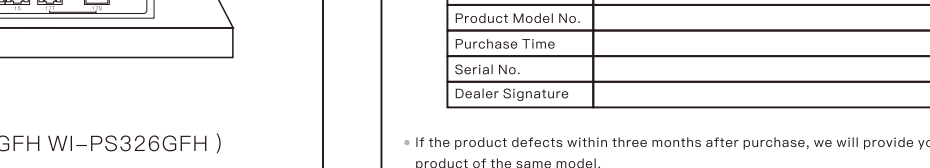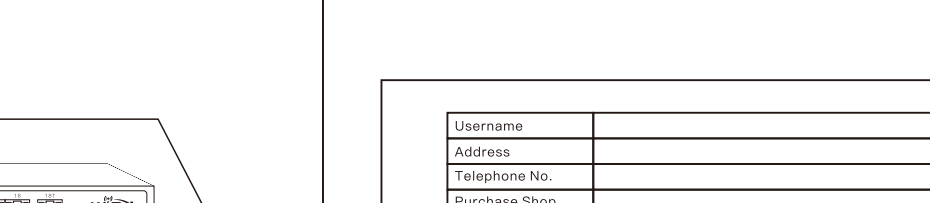

WI-PS318GFH DIP Switch Description	
Default	The transmission distance of PoE Port can be up to 100m with 100Mbps and disable port VLAN, Watchdog
CCTV	Enable Port VLAN and Watchdog mode, PoE transmit 250 meters with 10Mbps
LED indicators	Description
Power	On: The device power on is normal Off: The device is power off or failed
DATA	Blinking: Data transmission is active and working
PoE	On: PoE is working Off: PoE not working
LNK/ACT	On: Data on TX/RX Off: Ports link down
PoE Max	When total PoE output power > Power Budget * 80%, the LED light will be on

Note: PoE Watchdog -All PoE ports enable PoE watchdog function, which can detect and reboot the offline compliant PoE powered devices. Opening and closing PoE watchdog function:Closed by default, watchdog is turned on in VLAN and CCTV modes

WI-PS326GFH

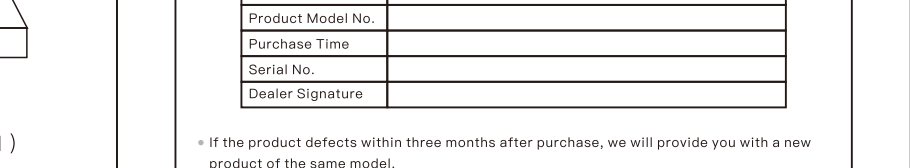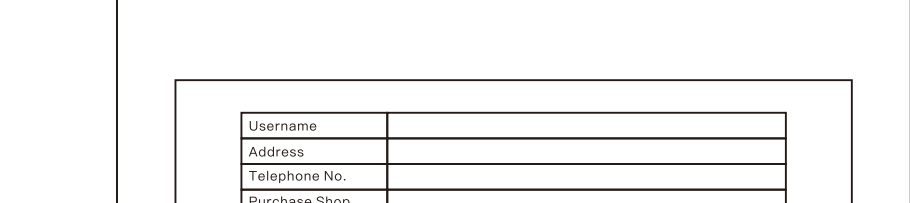


WI-PS326GFH DIP Switch Description	
Default	The transmission distance of PoE Port can be up to 100m with 100Mbps and disable port VLAN, Watchdog
CCTV	Enable Port VLAN and Watchdog mode, PoE transmit 250 meters with 10Mbps
LED indicators	Description
Power	On: The device power on is normal Off: The device is power off or failed
DATA	Blinking: Data transmission is active and working
PoE	On: PoE is working Off: PoE not working
LNK/ACT	On: Data on TX/RX Off: Ports link down
PoE Max	When total PoE output power > Power Budget * 80%, the LED light will be on

Note: PoE Watchdog -All PoE ports enable PoE watchdog function, which can detect and reboot the offline compliant PoE powered devices. Opening and closing PoE watchdog function:Closed by default, watchdog is turned on in VLAN and CCTV modes


4. Installation

1. Desktop Installation

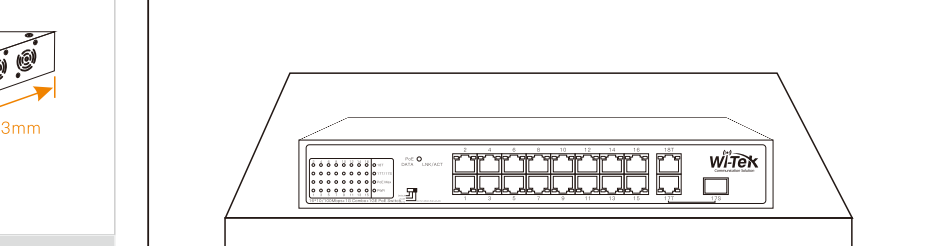

2. Rack-mount Installation

(WI-PS518GH WI-PS526GH WI-PS318GFH WI-PS326GFH)

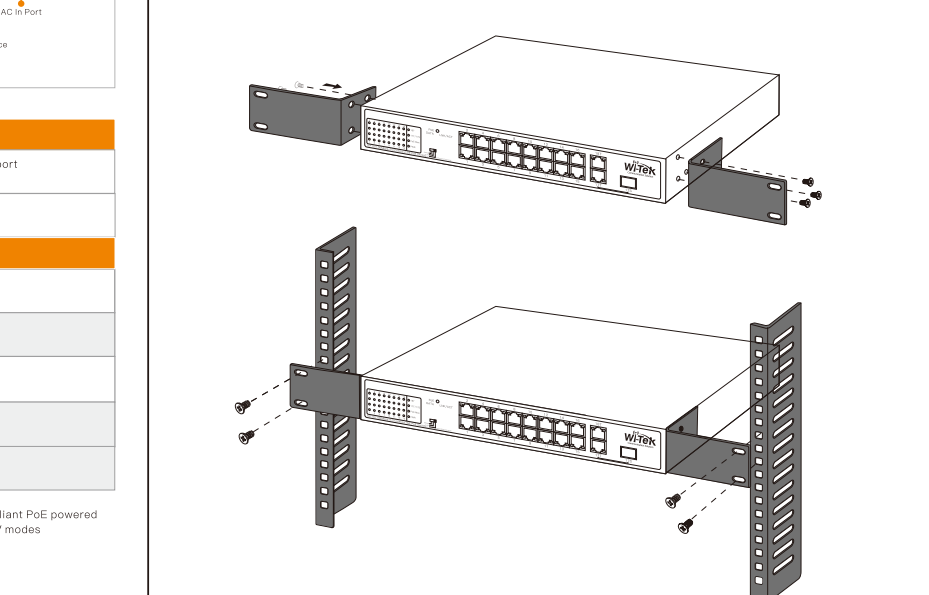

Warranty Card

Username	
Address	
Telephone No.	
Purchase Shop	
Purchase Address	
Product Model No.	
Purchase Time	
Serial No.	
Dealer Signature	

- If the product defects within three months after purchase, we will provide you with a new product of the same model.
- If the product defects within the three-year warranty period, we will provide professional maintenance service.
- Proof of purchase and a complete product serial number are required to receive any services guaranteed as part of the limited warranty.
- Any other defects that are not caused by workmanship or product quality, such as natural disasters, water damage, extreme thermal or environmental conditions, sticker damaged, warranty card loss will disqualify the product from limited warranty.



Technical Support



Company Website



Cloud Management

Wireless-Tek Technology Limited
Address: Building 3, Units 1801-1807, 1812,
Huaqiang Era Plaza, Tangwei Community,
Fuhai Street, Bao'an District, Shenzhen City,
Guangdong Province, China.
Website: www.wireless-90
Email: sales@wireless-tek.com
Technical Support: tech@wireless-tek.com

